

Driver installation not necessary, please connect each Trio screen to an USB C port using the USB C cable

Driver installation is necessary, please refer to section 2. Connect 1 USB-C cable to USB C port from your laptop

Driver installation is necessary, please refer to section 2. Connect 1 USB-C cable to USB C port from your laptop, and a 20W power supply to another

USB /c port

Place/ adhere magnet(s) into unfilled

holes and press Down to make sure it is firmly adhered, then remove template and mount your MP monitor

2. Swivel the displays to the ideal

viewing angle

4. Connect the cable

2. To access presentation mode, simply

3. Click "Next" in the Window below:

5. Please select "Yes, I want to restart

System software from following developers was blocked from loading.

"DJTVirtualDisplayAgent" would like to record this computer's screen.

Grant access to this application in Security & Privacy preferences, located in System Preferences.

6. Click on the "Lock" to make changes

8. Click on the Lock to save changes Click "Quit Now" and restart the laptop.

"DJTVirtualDisplayAgent" will not be able to record the contents of your screen until it is quit.

-When the drop down box is opened,

choose "Extend these displays"

-Now you are in Extend Mode

O
 Built-in Retina Display

To rearrange the displays, drag them to the desired position To relocate the meru bar, drag it to a different display.

Mirror Displays

Display Arrangement Color Night Shift

- Checking the "Mirror Displays" box will switch between duplicate and

- To rotate the display, go to the TRIO/-

TRIO PRO display window and choose

the suitable "Rotation" options.

Display Windows HD Color

Landscape

Older displays might not always of Detect to try to connect to them.

-Default size of text is set at 125% and

user can increase it up to 175% or reduce

Click in the scroll bur to

Jump to the next page

Jump to the spot that

TRIO 3 PRO

14 In

4.2 Lb

2.2K

60Hz

300N

<13W

back to 100% base on user preference.

Click Displays

extend mode for Trio/TRIO $\stackrel{\cdot}{\mathsf{PRO}}$

-Then click "Apply"

my computer now" and click Finish

to the back of the laptop. Connect the type-c cable

swivel Trio/TRIO PRO 180 degrees

USB-C/A

Clean laptop surface with included alcohol pad. Wait 10 secs for surface to dry.

USB-C

Representation of the second o

Center and square the template on

the back of your laptop.

3.1 Attachment Guide

3.2 Attachment mode

1. Detach the kickstand folio

3. Fold up the kickstand

1. Open the kickstand folio

2. Double click and launch the installer.

ant to allow this app to make

InstallScript Setup Launcher Unicode

4. Please select "I accept the terms of the license agreement" and click Next

4.2 Apple iOS installation guide

••• < > |

step 2-unlock it

4. (After System Reboot) Connect Mobile

5. Go to System Preferences > Security

7. Scroll and select "Screen Recording"

 Security & Privacy
 Search General FileVault Firewall Privacy

and check "DJTVirtualDisplayAgent"

Allow the apps below to record the co screen, even while using other apps.

☑ DJTVirtualDisplayAgent

Microsoft Teams

Skype

-Right click on your desktop while

Trio/TRIO PRO Is connected and choose

-Then you should either see this screen

-If you have a duplicate screen and want to change it to extend mode, click on the "Duplicate these displays" from the drop

#1

 O C > IIII Built-in Retina Display

Olisarch Display Arrangement Color Night Shift

- To position the display on either left

or right, simply drag and drop it to the

Apply Cancel

-To adjust content size on Trio/TRIO PRO monitor, first click on the number "2" monitor under Display setting.

-Scroll down and look for "scale and

layout" options

1. Go to System Settings

Model

Weight Resolution

Screen Size

Refresh Rate

Power Consumption

Brightness

To rearrange the displays, drag them to the desired positi To relocate the menu bar, drag it to a different display.

side you want.

- Click on system preference and go

5.2 Duplicate Mode to Extend Mode for Mac OS

5.3 Rotate Display and Layout set up for Windows

"Display Setting"

down box

0

Multi-tasking

to Displays

1 11

or the one at next Section

Google Chrome Step 2-Check the box

Open System Preferences"

& Privacy > Privacy

Contacts

[17] Calendars

Reminders

Photos

Multi-tasking

Pixels device to Mac computer, a screen recording prompt should pop up "Click

Click "Yes" in the window below.

3.4 Conference Mode

3.3 Presentation Mode


USB-C


USB-C

IF YOUR LAPTOP DOES NOT HAVE A

DP ENABLED USB-C PORT

IF YOUR LAPTOP HAS 1 DP **ENABLED USB-C PORT**

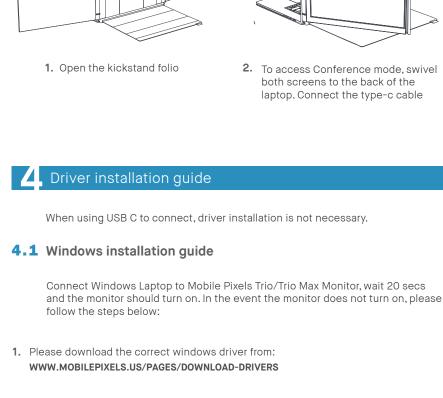

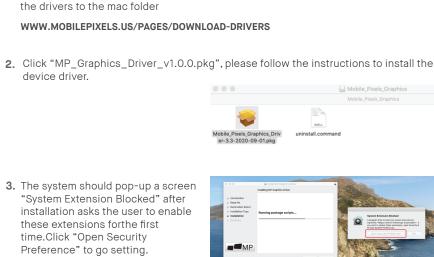


Important: This warning is not always shown. Even if it is not shown, for new installations the user must "Allow" to install the Mobile Pixels driver and restart the

step 1

step 3- click "Allow"

Do not plug the Mobile Pixels Device into your mac before executing the driver installation

1. Please download the Mac driver from the link below. Run the .pkg file to load

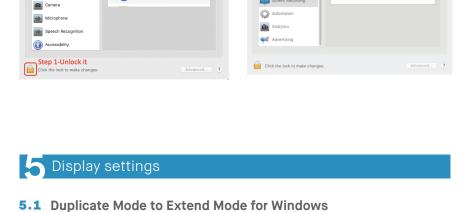

Specific

Access

If you are already in "Extend mode" and -Now your screen is upside down and want to use Trio/TRIO PRO on the left ready to be use on the left with 1 extra step. -First click on the 2nd screen icon -Move the 2nd display icon from the right to the left of the 1st display by -Then open the Orientation drop down box and change it from "Landscape" to "Landssimply "Drag and Drop" it. cape (flipped)"; Choose "Portrait" for -Click "Apply" to finish the setting of Portrait Mode". the lay out. -Then click "Apply" 5.4 Rotate Display and Layout set up for Mac OS

Change Display Settings to Adjust Content Size for Windows

□ Display □ Notific

□ Battery

Scroll Down

Change Display Settings to Adjust Content Size for Mac

DRAG AND DROP

- 3. Click on TRIO 3/3 Pro 4. Select your preferred resolution
- Android, Mac, Windows Compatible OS USB-C DP/HDMI Alternate Mode; Display Driver Video Signal *Specifications are subject to change without notice. 6.2 Power Consumption & Power Supply 7.5W. Power usage increases with higher brightness levels. Limited Power Mode revert to default settings. charger rated at 15W or higher.help. 6.3 Safety and Handling Important safety information Carefully go through the user manual and other documentation before setting up the TRIO/TRIO PRO. If any part is broken or damaged, do not try to open TRIO/TRIO PRO or attempt to fix it yourself, please contact the retailer, a qualified service technician or email us directly at contact@mobilepixels.us. Store TRIO/TRIO PRO under appropriate conditions, avoid exposure to extreme heat, moisture and dust. We recommend you to place TRIO/TRIO PRO on a stable surface and keep your TRIO/TRIO PRO in a sleeve to protect it during transport. Never spill liquid of any kind onto the surface or into the openings of the v. Do not spray any cleaner on the screen to avoid an electric shock. If your TRIO/TRIO PRO gets wet, unplug all cables and reconnect till the TRIO/TRIO PRO is completely dry. Carefully unplug all cables before cleaning TRIO/TRIO PRO. Clean with a soft, dry, lint-free cloth. To ensure satisfactory experience, use the TRIO/TRIO PRO with recommended display size of your laptop. Please disconnect the cables when you reverse the position of TRIO/TRIO PRO, decouple the TRIO/TRIO PRO from the backplane of your laptop, rotate 180° About a vector normal to the backplane, and re-couple to

TRIO/TRIO PRO and accessories contain small parts that may present a choking hazard to small children, please keep them out of reach from small children.

Choking hazard

the backplane of the laptop computer.

13.4" x 8.8" 0.9" Dimension 13.4" x 8.8 x 0.9" At the default brightness setting (20%), the monitor consumes approximately When connected to a <u>non-P</u>ower Delivery (PD) power source, the monitor enters capping brightness at 80%. If insufficient power is detected when increasing brightness, the monitor will automatically restart and To achieve full brightness and prevent flickering, use a PD-compliant USB-C

Trio 3

14 In

4.2 Lb

1080p FHD

60Hz

300N

<13W

Medical device interference The TRIO/TRIO PRO contains magnets. The TRIO/TRIO PRO also contain components and radios that emit electromagnetic fields. It may interfere with personal medical devices, e.g. pacemakers or defibrillators. Keep a safe distance between the TRIO/TRIO PRO and your medical device. Consult a physician or medical device manufacturer for specific details of your medical device. Stop

distance from TRIO/TRIO PRO.

to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: 1_Reorient or relocate the receiving antenna. 2_Increase the separation between the equipment and receiver. 3_Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. 4_Consult the dealer or an experienced radio/TV technician for help.

using TRIO/TRIO PRO if the interference is observed with your personal medical devices. Items with magnetically-stored data such as credit cards and hard drives may be sensitive to magnetic or electromagnetic fields, hence should be kept at a

Warranty Mobile Pixels INC warrants this product for a period of 1 year upon the original date of purchase. Product or service warranty will not be extended to any losses or damages that are due to improper installation, misuse, neglect, modification, alteration by non-authorized third party, improper environment, or other irregularities.

Support For detailed troubleshooting information, contact: contact@mobilepixels.us

FCC Compliance statement This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1_This device may not cause harmful interference. 2_This device must accept any interference received including interference that may cause undesired operation. Note: This equipment has been tested and found